


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-VS Vapor-Seal Modest series offers an industry-leading performance with deep energy savings and continuous dimming. This fixture is manufactured and designed using a gasketed enclosure to protect against dust, humidity and liquid spray. Easy installation for both surface-mount and suspended mount.

Perfect application for factories, tunnels, car washes, laboratories, cold storage, food processing and for vessels.

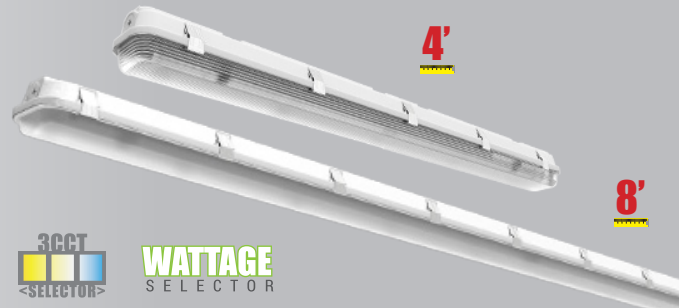

**CONSTRUCTION**

Durable polycarbonate housing and lens combined with stainless steel clips offer protection against dust, humidity and water spray. 5VA housing the highest classification in the UL94 Standard. Pre-fabricated paint with matte white finished. Wide profile design makes it easy for installation.

**OPTICAL SYSTEM**

Frosted polycarbonate lens reduces glare and improves overall energy efficiency.

**ELECTRICAL**

Luminaire is built with the highest quality driver that is universal voltage (120-277V), uses highly-efficient LED packages to ensure cool temperatures for long lasting life span.

**CONTROLS**

Options available for occupancy sensors with daylight harvesting function, TEELIO Bluetooth lighting controls, and Analog sensor.

**LISTING**

UL Listed, IP66 Rated, NEMA 4X, NSF, RoHS, DLC Premium

**LIFESPAN**


L70 > 100,000 hours based on LM-80 results and TM-21 calculations.

**TECHNICAL SPECIFICATION**

CCT	3500K/4000K/5000K
CRI	80+
DIMMING	1-10V dimming
BEAM ANGLE	110°
VOLTAGE	120V-277V, 50/60 Hz
CURRENT	0.9 - 0.33A
POWER FACTOR	>0.9
THD	≤10%
WORKING TEMPERATURE	-40°F ~ 122°F
IP RATING	IP66
WARRANTY	5 year limited (Standard)





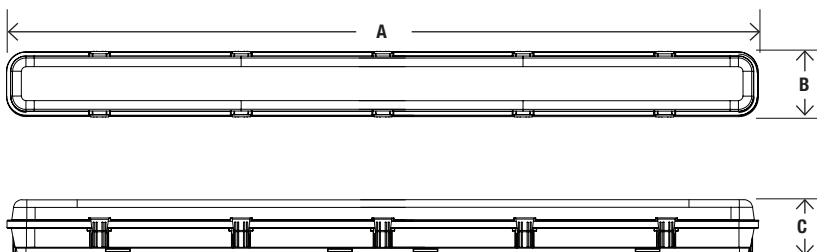

**DIMENSION**












DIMENSION	PT-VS-M0-4F-3CP	PT-VS-M0-8F-3CP
A	49.2"	98.4"
B	4.5"	5.3"
C	3.74"	3.74"
Net Weight	--	--
Gross Weight	10 lbs	18 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-VS-MO-4F-HW-3CP-PT-BTN-PT-ENG-25W**


<b>PT-VS-MO</b>	<b>4F</b>	<b>HW-3CP</b>			
Fixture			Controls/Sensors <sup>3</sup>		
Series	Size	CCT/Wattage	TEELIO <sup>1</sup>	Analog Sensors	Remote
PT-VS-MO	4F (4'-footer)	<b>3CP</b> (30W/40W/50W) (35K/40K/50K)	__ Blank  <b>PT-BTN</b> Internally Installed Low Voltage Bluetooth Node	__ Blank  <b>PT-MSH-LV-MW</b> Internally Installed Microwave Motion Sensor	__ Blank  <b>MSH-RC2</b> Remote Control Unit
	8F (8'-footer)	<b>3CP</b> (70W/80W/90W) (35K/40K/50K)	 <b>PT-A-EMS-MW</b> Microwave Eco Sensor		


Add-On <sup>3</sup>	Mounting	Fixture Add-on <sup>3</sup>	Other Option
<b>EM Battery</b> __ Blank  <b>PT-EMD-8W (4F)</b> 8W Low Output EM Battery Pack (Internal installation)  <b>PT-EMN-15W-050 (8F)</b> 15W Low Output EM Battery Pack (Internal installation)	<b>Surface Mount</b> __ Blank  <b>SM</b> Surface Mount Included  <b>V-HOOK</b> Suspended Mount Included	<b>Transformer<sup>2</sup></b> __ Blank  <b>PT-SDT-325</b> 325 VA Step down Transformer (Remote installation)	<b>Warranty</b> __ Blank (5 year standard) <b>7YR</b> 7-year Limited Warranty <b>10YR</b> 10-year Limited Warranty
		<sup>1</sup> <b>DOWNLOAD THE TEELIO APP</b>    	<sup>2</sup> <b>TRANSFORMER</b> <i>PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices.</i>
			<sup>3</sup> <b>SOLD SEPARATELY</b>

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**LUMEN PACKAGES**

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 <b>PT-VS-MO-4F-3CP</b>	30W	3500K	4,571	152	<b>S-WX44Y9</b>
		4000K	4,729	157	
		5000K	4,729	157	
	40W	3500K	5,870	146	
		4000K	6,126	153	
		5000K	5,988	149	
	50W	3500K	6,982	139	
		4000K	7,318	146	
		5000K	7,048	140	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 <b>PT-VS-MO-8F-3CP</b>	70W	3500K	11,287	161	<b>S-2GGX8Y</b>
		4000K	11,739	167	
		5000K	11,412	163	
	80W	3500K	12,409	155	
		4000K	13,127	164	
		5000K	12,568	157	
	90W	3500K	13,841	153	
		4000K	14,626	162	
		5000K	14,054	156	

QTY/CARTON

**WHAT'S IN THE BOX?**

- Fixture
- Installation sheet

**1**  
PIECES

