

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-VS Vapor-Seal Wide series offers an industry-leading performance with deep energy savings and continuous dimming. This fixture is manufactured and designed using a gasketed enclosure to protect against dust, humidity and liquid spray. Easy installation for both surface-mount and suspended mount.

Perfect application for factories, tunnels, car washes, laboratories, cold storage, food processing and for vessels.



CONSTRUCTION

Durable polycarbonate housing and lens combined with stainless steel clips offer protection against dust, humidity and water spray. 5VA housing the highest classification in the UL94 Standard. Pre-fabricated paint with matte white finished. Wide profile design makes it easy for installation.

OPTICAL SYSTEM

Frosted polycarbonate lens reduces glare and improves overall energy efficiency.

ELECTRICAL

Luminaire is built with the highest quality driver that is universal voltage (120-277V), uses highly-efficient LED packages to ensure cool temperatures for long lasting life span.

CONTROLS

Options available for occupancy sensors with daylight harvesting function, TEELIO Bluetooth lighting controls, and Analog sensor.

LISTING

UL Listed, IP66 Rated, NEMA 4X, NSF, RoHS, DLC Premium

LIFESPAN


L70 > 100,000 hours based on LM-80 results and TM-21 calculations.

TECHNICAL SPECIFICATION

CCT	3500K/4000K/5000K
CRI	80+
DIMMING	1-10V dimming
BEAM ANGLE	110°
VOLTAGE	120V-277V, 50/60 Hz
CURRENT	0.9 - 0.33A
POWER FACTOR	>0.9
THD	≤10%
WORKING TEMPERATURE	-40°F ~ 122°F
IP RATING	IP66
WARRANTY	5 year limited (Standard)





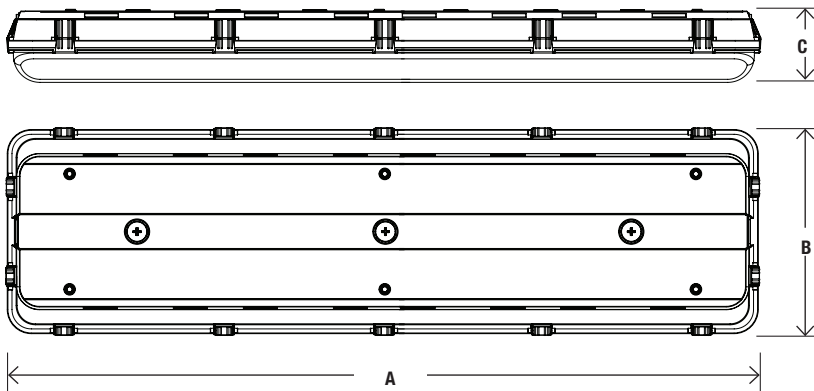

DIMENSION











DIMENSION	PT-VS-WD-4F-HW-3CP
A	49.2"
B	12.3"
C	4.25"
Net Weight	14.5 lbs
Gross Weight	17.5 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-VS-WD-4F-HW-3CP-PT-BTN-PT-ENG-25W


PT-VS-WD	4F	HW-3CP			
Fixture			Controls/Sensors ³		
Series	Size	CCT/Wattage	TEELIO ¹	Analog Sensors	Remote
PT-VS-WD	4F (4'-footer)	HW-3CP (150W/175W/200W) (35K/40K/50K)	__ Blank  PT-BTN Internally Installed Low Voltage Bluetooth Node  PT-A-EMS-MW Microwave Eco Sensor	__ Blank  PT-MSH-LV-MW Internally Installed Microwave Motion Sensor	__ Blank  MSH-RC2 Remote Control Unit

Add-On ³	Mounting	Fixture Add-on ³	Other Option
EM Battery __ Blank  PT-EMG-25W 25W Low Output EM Battery Pack (Internal installation)	Surface Mount __ Blank  SM Surface Mount Included)  V-HOOK Suspended Mount Included)	Transformer² __ Blank  PT-SDT-325 325 VA Step down Transformer (Remote installation)	Warranty __ Blank (5 year standard) 7YR 7-year Limited Warranty 10YR 10-year Limited Warranty
		¹ DOWNLOAD THE TEELIO APP    	² TRANSFORMER <i>PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.</i>
			³ SOLD SEPARATELY

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-VS-WD-4F-HW-3CP	150W	3500K	23,832	158	S-WVDGJV
		4000K	24,596	163	
		5000K	24,106	160	
	175W	3500K	26,608	152	
		4000K	27,705	158	
		5000K	27,067	154	
	200W	3500K	30,072	171	
		4000K	31,021	177	
		5000K	30,063	171	



- WHAT'S IN THE BOX?**
- Fixture
 - Installation sheet

QTY/CARTON

1
PIECES