

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor's VT2 series offers an industry-leading performance with deep energy savings and continuous dimming. This fixture is manufactured and designed using a gasketed enclosure to protect against dust, humidity and liquid spray. Suitable for damp and wet location. The compact, slick profile produces uniform and glare free lumen output. Easy installation for both surface-mount and suspended mount.

Perfect application for carports, parking structure lot, hallway and corridor.



**CONSTRUCTION**

Durable polycarbonate housing and lens combined with stainless steel clips offer protection against dust, humidity and water spray. 5VA housing the highest classification in the UL94 Standard. Pre-fabricated paint with matte white finished. Slim profile design makes it easy for installation.

**OPTICAL SYSTEM**

Frosted polycarbonate lens reduces glare and improves overall energy efficiency.

**ELECTRICAL**

Luminaire is built with the highest quality driver that is universal voltage (120-277V), uses highly-efficient LED packages to ensure cool temperatures for long lasting life span.

**CONTROLS**

Options available for occupancy sensors with daylight harvesting function, TEELIO Bluetooth lighting controls, and Lutron AWN.

**LISTING**

UL Listed, DLC Listed, NSF, IP65 Rated, ROHS

**LIFESPAN**


L70 > 100,000 hours

**TECHNICAL SPECIFICATION**

CCT	3500K/4000K/5000K
CRI	80+
DIMMING	1-10V dimming
BEAM ANGLE	110°
VOLTAGE	120V-277V, 50/60 Hz
CURRENT	0.9 - 0.33A
POWER FACTOR	>0.9
THD	≤10%
WORKING TEMPERATURE	-40°F ~ 113°F
IP RATING	IP65
WARRANTY	5 year limited (Standard)





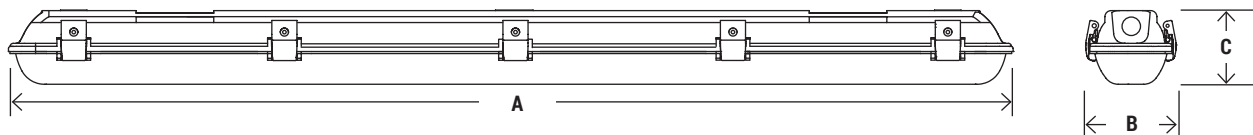

**DIMENSION**












DIMENSION	A	B	C	Net Weight	Gross Weight
PT-VT2-2F	23.6"	3.8"	3.1"	3 lbs	3.5 lbs
PT-VT2-4F	47.2"	3.8"	3.1"	4.5 lbs	5 lbs
PT-VT2-8F	94.5"	3.8"	3.1"	9.5 lbs	10.5 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-VT2-4F-3CP-**


<b>PT-VT2</b>			<b>3CP</b>		
Fixture			Controls/Sensors <sup>3</sup>		
Series	Size	CCT/Wattage	TEELIO <sup>1</sup>	Analog Sensors	Remote
PT-VT2	2F (2'-footer)	<b>3CP</b> (15W/20W/25W) (35K/40K/50K)	__ Blank  <b>PT-BTN</b> Internally Installed Low Voltage Bluetooth Node	__ Blank  <b>PT-MSK-LV-MW</b> Internally Installed Low Voltage Microwave Motion Sensor	__ Blank  <b>MSK-LV-RC</b> Low Voltage Remote Control (required)
	4F (4'-footer)	<b>3CP</b> (34W/38W/45W) (35K/40K/50K)	 <b>PT-A-EMS-MW</b> Microwave Eco Sensor		
	8F (8'-footer)	<b>3CP</b> (44W/65W/75W) (35K/40K/50K)			


<b>Add-On<sup>3</sup></b>	<b>Mounting</b>	<b>Fixture Add-on<sup>3</sup></b>	<b>Other Option</b>
<b>EM Battery</b>	<b>Surface Mount</b>	<b>Transformer<sup>2</sup></b>	<b>Warranty</b>
__ Blank  <b>PT-EMD-8W (2F)</b> 8W Low Output EM Battery Pack (Internal installation)	__ Blank  <b>SM</b> Surface Mount Included	__ Blank  <b>PT-SDT-325</b> 325 VA Step down Transformer (Remote installation)	__ Blank (5 year standard)  <b>7YR</b> 7-year Limited Warranty  <b>10YR</b> 10-year Limited Warranty
 <b>PT-EMD-32W (8F)</b> 32W Low Output EM Battery Pack (Internal installation)	<b>Suspended Mounting<sup>3</sup></b> __ Blank  <b>A-CBL</b> 8' Aircraft Cable, V-hook included	<b><sup>1</sup> DOWNLOAD THE TEELIO APP</b>    	
		<b><sup>2</sup> TRANSFORMER</b> <i>PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.</i>	
		<b><sup>3</sup> SOLD SEPARATELY</b>	


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**LUMEN PACKAGES**

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 <b>PT-VT2-2F-3CP</b>	15W	3500K	2,115	141	--
		4000K	2,265	151	
		5000K	2,145	143	
	20W	3500K	2,740	137	
		4000K	2,940	147	
		5000K	2,780	139	
	25W	3500K	3,325	133	
		4000K	3,575	143	
		5000K	3,375	135	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 <b>PT-VT2-4F-3CP</b>	34W	3500K	4,828	142	S-7FAUSE
		4000K	5,168	152	
		5000K	4,896	144	
	38W	3500K	5,282	139	
		4000K	5,662	149	
		5000K	5,358	141	
	45W	3500K	5,985	133	
		4000K	6,435	143	
		5000K	6,075	135	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 <b>PT-VT2-8F-3CP</b>	44W	3500K	6,248	142	S-JVX8W4
		4000K	6,688	152	
		5000K	6,336	144	
	65W	3500K	8,905	137	
		4000K	9,555	147	
		5000K	9,035	139	
	75W	3500K	9,975	133	
		4000K	10,725	143	
		5000K	10,125	135	



QTY/CARTON

**1**  
PIECES

**WHAT'S IN THE BOX?**

- Fixture
- Installation sheet