

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

BAFFLE FINISH


Portor's can-less recessed downlight with remote junction box, makes installation quick and easy. No recessed housing or junction box required. Available in 4" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.

120V-277V



CCT SELECTOR

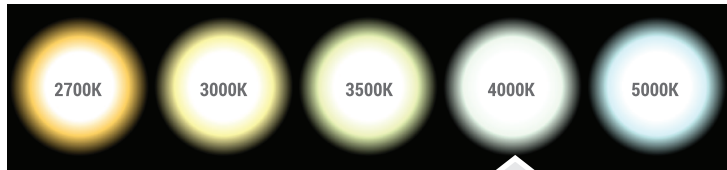

Easily flip the switch for desired CCT. It's that simple!

NOMINAL WATTAGE	DELIVERED LUMENS	EFFICACY
10W	751 LM @ 2700K	up to 87 lm/W
	813 LM @ 3000K	
	863 LM @ 3500K	
	871 LM @ 4000K	
	828 LM @ 5000K	

Actual lumens may vary.

CONSTRUCTION

PC driver housing and aluminum baffle trim with architectural white finish. Standard gasket included to ensure proper seal.

ELECTRICAL

Luminaire is built with the highest quality 120V-277V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

0-10V dimmable.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

VOLTAGE	120V-277V
POWER FREQUENCY	60 Hz
CRI	90
CCT	2700K 3000K 3500K 4000K 5000K
BEAM ANGLE	100°
IP RATING	Suitable for wet locations
DIMMABLE	0-10V dimmable
POWER FACTOR	>0.9
OPERATING TEMP.	-4°F ~ 113°F (-20°C ~ 45°C)
WARRANTY	5 year limited



ORDERING SAMPLE: PT-DLR-C-4I-10W-5CCT-277

Series	Aperture	Wattage	CCT (Selectable)	Voltage	*Options/Accessories				
PT-DLR-C Can-less Downlight with Remote J-Box	4I (4")	10W	5CCT (2700K / 3000K / 3500K / 4000K / 5000K)	277 (120-277)	<table border="1"> <tr> <td>EM Battery</td> <td>Mounting</td> </tr> <tr> <td>Blank (no EM) PT-EMG-25W</td> <td>Blank (no option) UNI-DLS RP-DLS-4I</td> </tr> </table>	EM Battery	Mounting	Blank (no EM) PT-EMG-25W	Blank (no option) UNI-DLS RP-DLS-4I
EM Battery	Mounting								
Blank (no EM) PT-EMG-25W	Blank (no option) UNI-DLS RP-DLS-4I								

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Direct Mounting

NO RECESSED HOUSING NEEDED

• For Retrofit or New Construction Installation •

These spring-action clips push up easily and fit securely for both retrofit and new construction installations.



2700K | 3000K | 3500K | 4000K | 5000K

Sealing gasket standard

Change color temperature with the simple flip of a switch

QTY/CARTON

24

PIECES

MOUNTING OPTIONS




UNI-DLS
4\"/>6\" Universal Housing
for New Construction



RP-DLS-4I
4\"/> Rough plate

DIMENSION

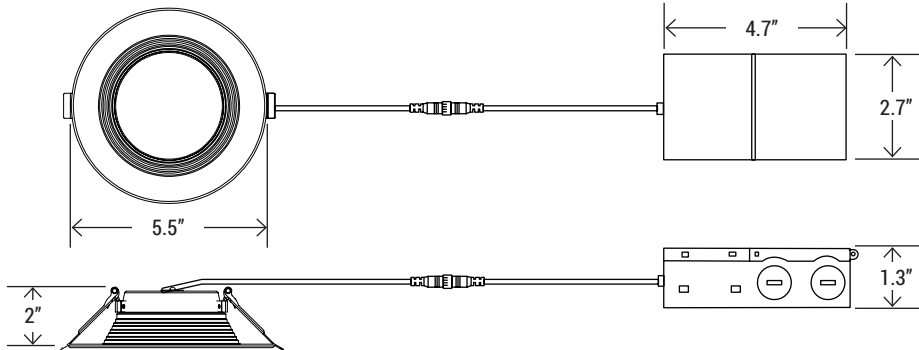

EM OPTION



PT-EMG-25W
Universal Voltage
LED Emergency Back-up Driver

PHOTOMETRY

For complete IES files, please visit our website.

