

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**BAFFLE FINISH**

Portor's can-less recessed downlight with remote junction box, makes installation quick and easy. No recessed housing or junction box required. Available in 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



**CONSTRUCTION**

PC driver housing and aluminum baffle trim with architectural white finish. Standard gasket included to ensure proper seal.

**ELECTRICAL**

Luminaire is built with the highest quality 120V-277V drivers, ensuring energy efficiency.

**ENERGY SAVINGS**

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

**DIMMING**

0-10V dimmable.

**LISTING**


ETL Listed, FCC, RoHS, CE & Energy Star Listed

**TECHNICAL SPECIFICATION**

WATTAGE	15W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
VOLTAGE	120V
POWER FREQUENCY	60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-4°F ~ 113°F
IP RATING	Suitable for wet locations
WARRANTY	5 year limited (Standard)



**DIMENSION**

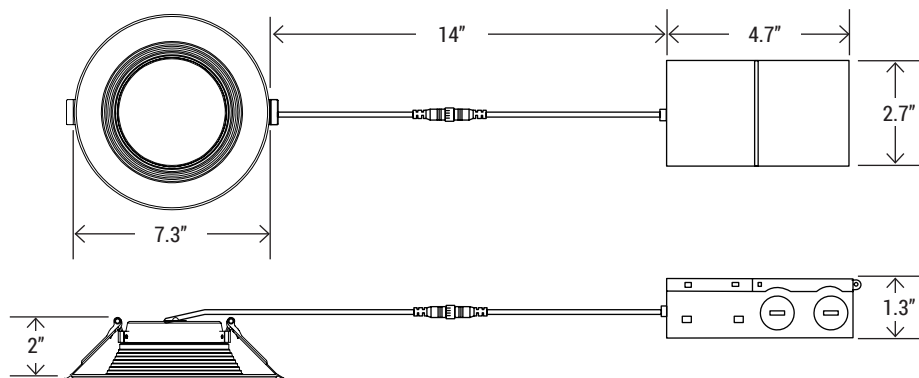





Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**ORDERING SAMPLE: PT-DLR-C-6I-15-5CCT-2**

**PT-DLR** - **C** - **6I** - **15W** - **5CCT** - **2**

Fixture					
Series	Style	Size	Max Wattage	CCT/Wattage	Generation
<b>PT-DLR</b>	<b>C</b> (Can-less)	<b>6I</b> (6" Aperture)	<b>15W</b> (Wattage)	<b>5CCT</b> (27K/30K/35K/40K/50K)	<b>2</b> (2nd Generation)

<p><b>Control/Sensor<sup>2</sup></b></p> <p><b>TEELIO<sup>1</sup></b></p> <p>__ Blank</p>  <p><b>PT-BTC-PHA</b> Bluetooth Phase Controller</p>	<p><b>Add-On<sup>2</sup></b></p> <p><b>EM Battery</b></p> <p>__ Blank</p>  <p><b>PT-EMA-8W</b> AC Emergency Battery Pack (Remote installation)</p>	<p><b>Fixture Add-on<sup>2</sup></b></p> <p><b>Mounting Options</b></p> <p>__ Blank</p>  <p><b>UNI-DLS</b> 4"6" Universal Housing for New Construction</p>  <p><b>RP-DLS-6I</b> 6" Rough plate</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<sup>1</sup> **DOWNLOAD THE TEELIO APP**




<sup>2</sup> **SOLD SEPARATELY**

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**LUMEN PACKAGES**

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 PT-DLR-C-6I-15W-5CCT-2	15W	2700K	1,340	up to 93 lm/W
		3000K	1,376	
		3000K	1,400	
		4000K	1,368	
		5000K	1,378	

**Direct Mounting**

NO RECESSED HOUSING NEEDED

• For Retrofit or New Construction Installation •

These spring-action clips push up easily and fit securely for both retrofit and new construction installations.



2700K | 3000K | 3500K | 4000K | 5000K

Change color temperature with the simple flip of a switch



**WHAT'S IN THE BOX?**

- Fixture
- Installation sheet

**QTY/CARTON**

**24**  
PIECES