

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

BAFFLE FINISH

Portor's can-less recessed downlight with remote junction box, makes installation quick and easy. No recessed housing or junction box required. Available in 6" and featuring color selectable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.

120V-277V



CONSTRUCTION

PC driver housing and aluminum baffle trim with architectural white finish. Standard gasket included to ensure proper seal.

ELECTRICAL

Luminaire is built with the highest quality 120V-277V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than traditional lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

DIMMING

0-10V dimmable.

LISTING


ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

WATTAGE	15W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	0-10V dimming
VOLTAGE	120V-277V
POWER FREQUENCY	60 Hz
BEAM ANGLE	100°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-4°F ~ 113°F
IP RATING	Suitable for wet locations
WARRANTY	5 year limited (Standard)



DIMENSION

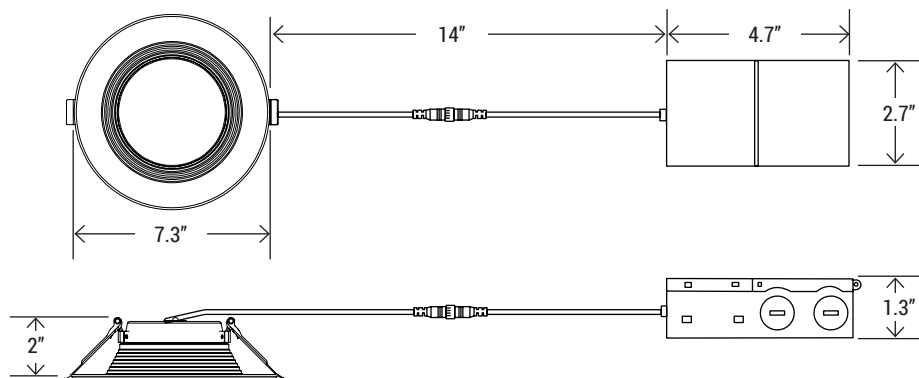




Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-DLR-C-6I-15-5CCT-277-2

PT-DLR - **C** - **6I** - **15W** - **5CCT** - **277** - **2**

Fixture						
Series	Style	Size	Max Wattage	CCT/Wattage	Voltage	Generation
PT-DLR	C (Can-less)	6I (6" Aperture)	15W (Wattage)	5CCT (27K/30K/35K/40K/50K)	277 (120-277V)	2 (2nd Generation)

Control/Sensor ² TEELIO ¹	Add-On ² EM Battery	Fixture Add-on ² Mounting Options
<p>__ Blank</p>  <p>PT-BTC-6 Bluetooth Controller</p>  <p>PT-BTC-20 20A Bluetooth Controller</p>	<p>__ Blank</p>  <p>PT-EMA-8W AC Emergency Battery Pack (Remote installation)</p>	<p>__ Blank</p> <p>UNI-DLS 4"6" Universal Housing for New Construction</p> <p>RP-DLS-6I 6" Rough plate</p>

¹ **DOWNLOAD THE TEELIO APP**




² **SOLD SEPARATELY**

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 PT-DLR-C-6I-15W-5CCT-277-2	15W	2700K	1,340	up to 93 lm/W
		3000K	1,376	
		3000K	1,400	
		4000K	1,368	
		5000K	1,378	

Direct Mounting

NO RECESSED HOUSING NEEDED

• For Retrofit or New Construction Installation •

These spring-action clips push up easily and fit securely for both retrofit and new construction installations.



2700K | 3000K | 3500K | 4000K | 5000K

Change color temperature with the simple flip of a switch



WHAT'S IN THE BOX?
• Fixture
• Installation sheet

QTY/CARTON

24
PIECES