

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim round profile residential downlights are taking the market by storm! Available in 6" and featuring color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



**FEATURES**

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Ultra slim design, 1" thickness
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation
- Damp location rated for soffit applications
- Install J-Box in ceiling beam, and insert light right into drywall opening

**DIMMING**

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

**LISTING**


ETL Listed, Energy Star Listed, RoHS

**TECHNICAL SPECIFICATION**

WATTAGE	12W
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
DIMMING	Triac dimming
BEAM ANGLE	110°
VOLTAGE	120V, 50/60 Hz
POWER FACTOR	>0.9
RATING	Suitable for damp locations
WARRANTY	5 year limited (Standard)



**DIMENSION**

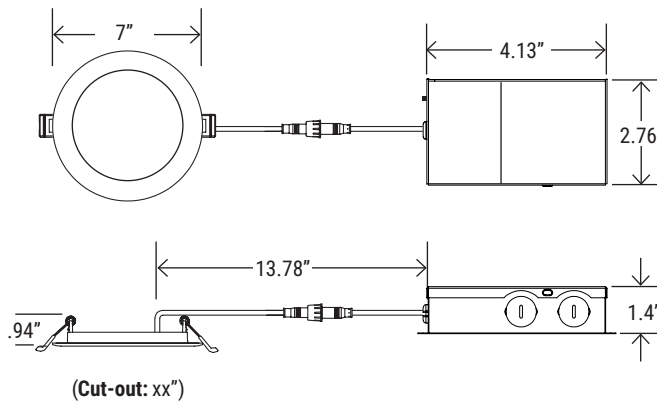

Net Weight	.5 lb
Gross Weight	1 lb

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------


**ORDERING SAMPLE: PT-DLS-R-6I-12-5CCT-3**

<b>PT-DLS</b>	-	<b>R</b>	-	<b>6I</b>	-	<b>12W</b>	-	<b>5CCT</b>	-	<b>3</b>	-	
---------------	---	----------	---	-----------	---	------------	---	-------------	---	----------	---	--

Fixture						
Series	Shape	Size	Max Wattage	CCT	Generation	Color
<b>PT-DLS</b>	<b>R</b> (Round)	<b>6I</b> (6" Aperture)	<b>12W</b> (Wattage)	<b>5CCT</b> (27K/30K/35K/40K/50K)	<b>3</b> (3rd Generation)	<b>_Blank</b> (White) <b>BK</b> (Black)

**Control/Sensor<sup>3</sup>**  
TEELIO<sup>1</sup>


**\_Blank**



**PT-BTC-PHA**  
Bluetooth Phase Controller

**Add-On<sup>3</sup>**  
EM Battery

**\_Blank**



**PT-EMA-25W**  
Low Output Voltage EM Battery Pack  
(Remote installation)

**Mounting<sup>3</sup>**  
Mounting Options

**\_Blank**



**RP-DLS-R-6I**  
6" Slim LED Rough Plate

" Universal Slim LED Rough Plate" data-bbox="525 540 660 595"/>

**RP-UNI-R-46**  
4"/6" Universal Slim LED Rough Plate

" Universal Slim LED Housing for new Construction" data-bbox="525 625 670 685"/>

**UNI-DLS-R**  
4"/6" Universal Slim LED Housing  
for new Construction

**COMPATIBLE DIMMERS**

LUTRON	LEVITON	LEGRAND
<ul style="list-style-type: none"> <li>• CT-600P</li> <li>• DVLC-153P</li> <li>• MSCL-OP153M</li> <li>• PD-6WCL</li> <li>• MACL-153M/MA-R</li> <li>• TG-600PR-WH</li> <li>• S-600PR-WH</li> </ul>	<ul style="list-style-type: none"> <li>• CTCL-153PDH-WH</li> <li>• TGCL-153PH-LA</li> <li>• SLV-600P-AL</li> <li>• DV-600PR-WH</li> <li>• SCL-153PH-WH</li> </ul>	<ul style="list-style-type: none"> <li>• RNL06</li> <li>• 6672</li> <li>• 6674</li> <li>• IPL06</li> <li>• DLS06</li> <li>• SELV-300P-WH</li> <li>• VP106-1LZ</li> </ul>
		<ul style="list-style-type: none"> <li>• ADTP70TU</li> </ul>

**<sup>1</sup>DOWNLOAD THE TEELIO APP**




**<sup>3</sup> SOLD SEPARATELY**

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**LUMEN PACKAGES**

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)
 <b>PT-DLS-R-6I-12W-5CCT-3</b>	12W	2700K	996	83
		3000K	1,016	85
		3500K	1,046	89
		4000K	1,039	87
		5000K	1,011	85

**QTY/CARTON**

**WHAT'S IN THE BOX?**

- Fixture
- Installation sheet

**1**  
PIECES